


PM Manual Variable Optical Attenuator

☆ Features

- High Precision
- Wide Attenuation Range
- Low Insertion Loss



☆ Application

- Optical Communication Systems Test
- Optics Laboratory

☆ Specifications

Parameter	Unit	Value		
		1310	1550	1064
Center Wavelength	nm	1310	1550	1064
Operating Wavelength Range	nm	±40		±20
Attenuation Range	dB	0.6~60		
Max. Insertion Loss	dB	0.6		
Min. Return Loss	dB	50		
Adjustment Precision	dB	0.02		
Min. Extinction Ratio	dB	0.15		
Max. Power Handling	mW	500		
Fiber Type	-	PM Panda Fiber		
Package Dimensions	mm	26x18x8		
Operating Temperature	°C	0 ~ +70		
Operating Temperature	°C	-40 ~ +85		

Address: 5F, Building 2, Invengo Industrial Park, TongGuan Road, GongMing Street, GuangMing New District ShenZhen, China


Website: www.szoscom.com

Phone: +86-755-83118073

Fax: +86-755-83272391

E-mail: sales@szoscom.com

☆ Package Dimensions

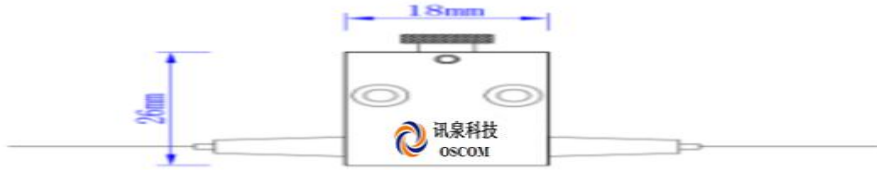

☆ Ordering Information

Device ID	Explain	Option		
XX	Device Type	XQ-PMMVOA		
XXXX	Center Wavelength	1310=1310nm 1550=1550nm	1064=1064nm	
X	Fiber Type	1=PM Panda fiber		
XXXX	Pigtail Type	250=250 Bare fiber 2000=2mm Loose tube	900=900um Loose tube 3000=3mm Loose tube	
XX	Pigtail Length	08=0.8 m	10=1m	S=Specified
XX	Connector Type	FU=FC/UPC SA=SC/APC N=None	FA=FC/APC LU=LC/UPC	SU=SC/UPC LA=LC/APC

Example: XQ-PMMVOA-1310-1-250-08-FU